



Ceramic Plate, Open Flame Radiant Heating Systems

SPECIFICATIONS

"Ideal solution for places with low ceiling height"

- Low Fuel Consumption
- High Efficiency
- Spot Area Heating
- Noiseless Operating Feature
- Can be used with natural gas or LPG
- Ability to work parallel to the ground with 0°
- 900 °C Ceramic Surface Temperature
- Fulfills All Obligations of the EN 419 - 1 Standard.

"Single Remote Control System for up to 32 Devices"

Ceramic Heaters

"CAFE RESTAURANT"

SRP 6 - Blackglass

SUNRAY[®]




CE



Ergonomic Design New
Generation Technology
Glass Device

MODELS	Rated Power (Kw)		Number of Burners	Fuel Consumption N. Gas		Fuel Consumption Lpg		Minimum Mounting Height	Flammable Material Min. Distance
	Min.	Max.		Min.	Max.	Min.	Max.		
SRP 6 BLACKGLASS	15		1	1,56		1,12		180 cm	193 cm
SRP 6 ÇK BLACKGLASS	7,5	15		0,78	1,56	0,56	1,12		
Electricity Information	230 V AC - 50 Hz - 0,6 amps								
Ignition	Electronic Ignition								
Operating Pressure Range	20 - 60 mbar								
Device Dimensions	Altitude		Breadth		Depth		Weight		
	35 cm		84 cm		50 cm		17 kg		

SRP 4 DESIGN

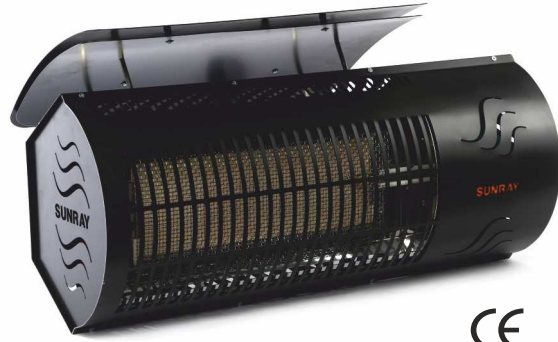

CE

MODELS	Rated Power (Kw)		Number of Burners	Fuel Consumption N. Gas		Fuel Consumption Lpg		Minimum Mounting Height	Flammable Material Min. Distance
	Min.	Max.		Min.	Max.	Min.	Max.		
SRP 4 ÇK DESIGN	5	10	1	0,52	1,04	0,37	0,75	150 cm	168 cm
SRP 1x4 ÇKY DESIGN	6	12		0,63	1,25	0,45	0,90		
Electricity Information	230 V AC - 50 Hz - 0,6 amps								
Ignition	Electronic Ignition								
Operating Pressure Range	20 - 60 mbar								
Device Dimensions	Altitude		Breadth		Depth		Weight		
	23 cm		70 cm		50,5 cm		15 kg		

Ergonomic Design
New Generation
Technology

SRP 6 DESIGN



CE

MODELS	Rated Power (Kw)		Number of Burners	Fuel Consumption N. Gas		Fuel Consumption Lpg		Minimum Mounting Height	Flammable Material Min. Distance
	Min.	Max.		Min.	Max.	Min.	Max.		
SRP 6 DESIGN	15		1	1,56		1,12		180 cm	193 cm
SRP 6 ÇK DESIGN	7,5	15		0,78	1,56	0,56	1,12		
Electricity Information	230 V AC - 50 Hz - 0,6 amps								
Ignition	Electronic Ignition								
Operating Pressure Range	20 - 60 mbar								
Device Dimensions	Altitude		Breadth		Depth		Weight		
	23 cm		88 cm		50,5 cm		16,5 kg		

Ceramic Heaters "CAFE RESTAURANT"

SRP 4

SUNRAY[®]



CE

MODELS	Rated Power (Kw)		Number of Burners	Fuel Consumption N. Gas		Fuel Consumption Lpg		Minimum Mounting Height	Flammable Material Min. Distance
	Min.	Max.		Min.	Max.	Min.	Max.		
SRP ART K 7	7		1	0,73		0,52		150 cm	168 cm
SRP 4	10			1,04		0,75			
SRP 4 ÇK	5	10		0,52	1,04	0,37	0,75		
SRP 1x4 ÇKY	6	12		0,63	1,25	0,45	0,90		
Electricity Information	230 V AC - 50 Hz - 0,6 amps								
Ignition	Electronic Ignition								
Operating Pressure Range	20 - 60 mbar								
Device Dimensions	Altitude		Breadth		Depth		Weight		
	44,5 cm		57 cm		48 cm		15 kg		

SRP 6



CE

MODELS	Rated Power (Kw)		Number of Burners	Fuel Consumption N. Gas		Fuel Consumption Lpg		Minimum Mounting Height	Flammable Material Min. Distance
	Min.	Max.		Min.	Max.	Min.	Max.		
SRP 6	15		1	1,56		1,12		180 cm	193 cm
SRP 6 ÇK	7,5	15		0,78	1,56	0,56	1,12		
Electricity Information	230 V AC - 50 Hz - 0,6 amps								
Ignition	Electronic Ignition								
Operating Pressure Range	20 - 60 mbar								
Device Dimensions	Altitude		Breadth		Depth		Weight		
	44,5 cm		75,5 cm		48 cm		18,5 kg		

Ceramic Heaters "INDUSTRIAL"

SRP 8

SUNRAY[®]



CE

MODELS	Rated Power (Kw)		Number of Burners	Fuel Consumption N. Gas		Fuel Consumption Lpg		Minimum Mounting Height	Flammable Material Min. Distance
	Min.	Max.		Min.	Max.	Min.	Max.		
SRP 8	20		1	2,08		1,50		200 cm	206 cm
SRP 8 ÇK	10	20		1,04	2,08	0,75	1,50		
Electricity Information	230 V AC - 50 Hz - 0,6 amps								
Ignition	Electronic Ignition								
Operating Pressure Range	20 - 60 mbar								
Device Dimensions	Altitude		Breadth		Depth		Weight		
	47 cm		95 cm		48 cm		18,5 kg		

SRP 10



CE

MODELS	Rated Power (Kw)		Number of Burners	Fuel Consumption N. Gas		Fuel Consumption Lpg		Minimum Mounting Height	Flammable Material Min. Distance
	Min.	Max.		Min.	Max.	Min.	Max.		
SRP 1 x 10	27		1	2,81		2,02		200 cm	206 cm
SRP 1 x 10 ÇKY	15	27		1,56	2,81	1,12	2,02		
Electricity Information	230 V AC - 50 Hz - 0,6 amps								
Ignition	Electronic Ignition								
Operating Pressure Range	20 - 60 mbar								
Device Dimensions	Altitude		Breadth		Depth		Weight		
	47 cm		115 cm		48 cm		20 kg		

Ceramic Heaters "INDUSTRIAL"

SRP 12

SUNRAY[®]



MODELS	Rated Power (Kw)		Number of Burners	Fuel Consumption N. Gas		Fuel Consumption Lpg		Minimum Mounting Height	Flammable Material Min. Distance
	Min.	Max.		Min.	Max.	Min.	Max.		
SRP 1 x 12	32		1	3,34		2,39		200 cm	206 cm
SRP 1 x 12 ÇKY	15	32		1,56	3,34	1,12	2,39		
Electricity Information	230 V AC - 50 Hz - 0,6 amps								
Ignition	Electronic Ignition								
Operating Pressure Range	20 - 60 mbar								
Device Dimensions	Altitude		Breadth		Depth		Weight		
	47 cm		130 cm		48 cm		21,5 kg		

Smart Solutions for Large Areas

SRP 2 x 4



MODELS	Rated Power (Kw)		Number of Burners	Fuel Consumption N. Gas		Fuel Consumption Lpg		Minimum Mounting Height	Flammable Material Min. Distance
	Min.	Max.		Min.	Max.	Min.	Max.		
SRP 2 x 4	23		2	2,40		1,72		200 cm	206 cm
SRP 2 x 4 ÇKY	12	23		1,25	2,40	0,90	1,72		
Electricity Information	230 V AC - 50 Hz - 0,6 amps								
Ignition	Electronic Ignition								
Operating Pressure Range	20 - 60 mbar								
Device Dimensions	Altitude		Breadth		Depth		Weight		
	60 cm		57 cm		32 cm		16 kg		

Ceramic Heaters "INDUSTRIAL"

SRP 2 x 8



MODELS	Rated Power (Kw)		Number of Burners	Fuel Consumption N. Gas		Fuel Consumption Lpg		Minimum Mounting Height	Flammable Material Min. Distance
	Min.	Max.		Min.	Max.	Min.	Max.		
SRP 2 x 8	38,1		2	3,97		2,85		200 cm	206 cm
SRP 2 x 8 ÇK	19,1	38,1		1,99	3,97	1,43	2,85		
Electricity Information	230 V AC - 50 Hz - 0,6 amps								
Ignition	Electronic Ignition								
Operating Pressure Range	20 - 60 mbar								
Device Dimensions	Altitude		Breadth		Depth		Weight		
	64,5 cm		114 cm		32 cm		25 kg		

SRP 2 x 10

MODELS	Rated Power (Kw)		Number of Burners	Fuel Consumption N. Gas		Fuel Consumption Lpg		Minimum Mounting Height	Flammable Material Min. Distance
	Min.	Max.		Min.	Max.	Min.	Max.		
SRP 2 x 10	51		2	5,32		3,81		200 cm	206 cm
SRP 2 x 10 ÇKY	26	51		2,71	5,32	1,94	3,81		
Electricity Information	230 V AC - 50 Hz - 0,6 amps								
Ignition	Electronic Ignition								
Operating Pressure Range	20 - 60 mbar								
Device Dimensions	Altitude		Breadth		Depth		Weight		
	64,5 cm		127 cm		32 cm		25 kg		

SRP 2 x 12

MODELS	Rated Power (Kw)		Number of Burners	Fuel Consumption N. Gas		Fuel Consumption Lpg		Minimum Mounting Height	Flammable Material Min. Distance
	Min.	Max.		Min.	Max.	Min.	Max.		
SRP 2 x 12	62		2	6,46		4,64		200 cm	206 cm
SRP 2 x 12 ÇKY	34	62		3,54	6,46	2,54	4,64		
Electricity Information	230 V AC - 50 Hz - 0,6 amps								
Ignition	Electronic Ignition								
Operating Pressure Range	20 - 60 mbar								
Device Dimensions	Altitude		Breadth		Depth		Weight		
	64,5 cm		130 cm		32 cm		28 kg		